


## ■ INSTALLATION PRECAUTIONS

- 1. Read the installation manual thoroughly before beginning installation to ensure the unit is installed safely and correctly.
- 2. This hand dryer must have its own independent branch circuit using AWG #12 or #14 copper wire.
- 3. The circuit should be equipped with a Ground Fault Interrupter and a 120vac 20 amp circuit breaker for AWG #12 wire, or a 120Vac 15 amp circuit breaker for AWG #14 wire.
- 4. This hand dryer should be properly grounded.
- 5. No not install in the following types of location.
  - Outdoors
  - •Where the temperature could be lower than 50° F(10℃) or higher than 104° F(40℃).
  - ·Where the humidity could be lower than 5%RH or higher than 95%RH.
  - ·Where there is a lot of dust or condensation.
  - ·Where salt damage could occur.
  - Vehicles (incl. ships, trains, airplanes)
- ·Where there corrosive, neutral, or reductive gases are present.
- ·Where there are food, tableware, etc nearby because water may splash.
- ·Where the appliance may come into direct contact with water.
- ·Where the appliance is direct sunlight or strong light.
- (May cause the sensors to malfunction)
- ·Near a bathtubs, shower or a swimming pool.
- Kitchens (Where there is a risk of water splashing)

Surface should be vertical, smooth and flat.

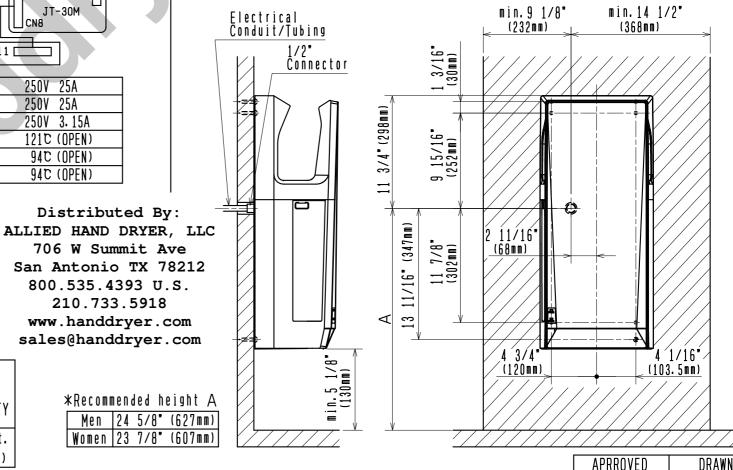

	5.5.5.6	MATERIALO	<u>COLOR (MUNSELL)</u>			
No.	PARTS	MATERIALS		-\$		
01	FRONT PANEL	ABS RESIN		SILVER		
02	SIDE PANEL-R	ABS RESIN				
03	SIDE PANEL-L	ABS RESIN		DARK GRAY		
04	PANEL-FRONT	ABS RESIN		/ 1.7PB:HUE \		
05	PANEL-BACK	ABS RESIN		2 :BRIGHTNESS		
06	SIDE COVER	ABS RESIN	'	\ 0.38:CHROMA /		
07	DRAIN TANK	ABS RESIN				
08	BASE	PP RESIN	BLAC	:K		
09	AIR FILTER	PP RESIN	BLAC	:K		
10	BACK PANEL	STEEL	GRA'	Υ		

CERTIFICATIONS

Intertek

4007207

■ SPECIFICATIONS

MODEL	RATED VOLTAGE (Vac)	RATED FREQUENCY (Hz)	RATED CURRENT (A)	AIR SPEED SETTING	POWE CONSUMP HEATER ON	R TION(W) HEATER OFF	AIR SPEED (mph)	NOISE (dB(A))	WEIGHT	DRAIN TANK CAPACITY
IT ODIICHIO O NA	120	60	11.4	HIGH	1,250	730	235	59	26.516.	1.7pt.
JT-SB116JH2-S-NA				STANDARD	1,090	570	215	56	(12kg)	(0.81)

MOTOR TYPE THERMAL FUSES AND OVER CURRENT FUSES 110MQ OR MORE (MEASURED BY DC500V MEGGER) DIELECTRIC STRENGTH | 1,000Vac FOR 1 MINUTE

- Air speed is calculated from the static pressure measured by the pitot tube. (at the nozzle)
  Noise is the A range value measured in an anechoic room. (Average as 3 points, 78 3/4" (2000mm) from the front and both sides)
  The heater is turned off automatically when ambient temperature is 86° F(30°C) 30°C or more.
  Compliance: Conforms to ANSI/UL Std. UL499 and Certified to CAN/CSA Standard C22.2 No. 36
- Conforms to NSF/ANSI Standard 169.

\*Specifications may be subject to change without notice.

SCALE: NTS PRODUCT: MITSUBISHI HAND DRYER MITSUBISHI ELECTRIC MODEL: JT-SB116JH2-S-NA UNIT: Inches(mm) |DATE:JUN.17.2016|DWG.No.: NL116002 A

706 W Summit Ave

800.535.4393 U.S. 210.733.5918

M. Fukano

|Shigeki.Nishimura