

XLERATOR[®] HAND DRYER MOBILE HAND HYGIENE STATION

REMOVES 99.999% OF VIRUSES FROM THE AIRSTREAM¹



The World Health Organization And Centers For Disease Control and Prevention List Proper Hand Hygiene As Top Defense Against The Spread Of Germs Like The Coronavirus.



Hand Sanitizer Dispenser Not Included

XLERATOR + HEPA = PROPER HAND HYGIENE

- Proper hand hygiene is washing and **completely drying**
- XLERATOR is proven to **dry hands completely in as little as 8 seconds²**, per independent testing to global UL Environment PCR testing standards
- XLERATOR with HEPA Filtration **removes 99.999% of viruses** from the airstream

THE ULTIMATE SOLUTION FOR MOBILE HAND HYGIENE

STURDY & MOBILE

- Sturdy metal frame and base comes with handle and casters, allowing simple lean-and-roll mobility of entire unit

STANDARD PLUG-IN

- Three-prong plug works off standard outlet

OPTIONAL HAND SANITIZER BRACKET

- Add your preferred hand sanitizer solution for even higher levels of hygiene

HAND DRYER BENEFITS





- ✓ HEPA Filtration System
- ✓ 95% cost savings vs. paper towels
- ✓ Industry-leading 7-year limited warranty
- ✓ Made In USA Certified[®]

ELIMINATE PAPER TOWEL HASSLES

- ✗ Significant cost to purchase
- ✗ Currently in short supply
- ✗ Inconvenience of ordering, shipping, restocking
- ✗ Maintenance of germ-laden paper towel waste

XLERATOR® HAND DRYER MOBILE HAND HYGIENE STATION PATENT PENDING

MODEL: XL - SB - M - 110V

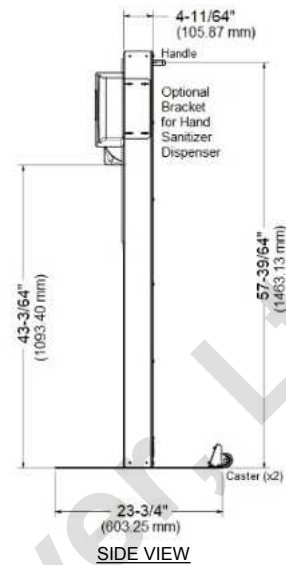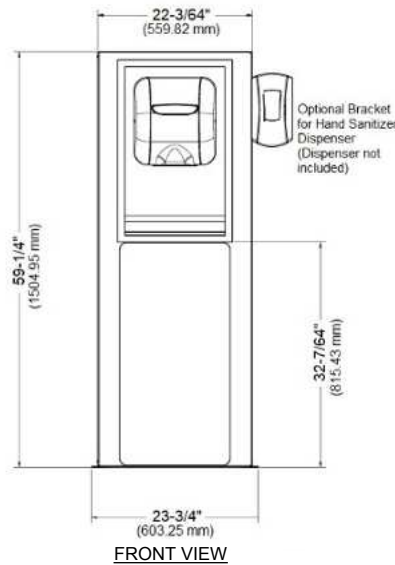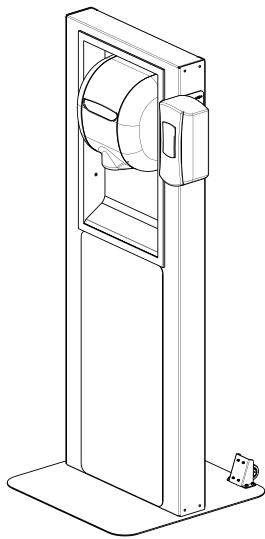

XL-SB + #40502

Brushed Stainless Steel XLERATOR
with Recess Kit

FEATURES & BENEFITS

TESTED TO
PCR
GUIDELINES

DRY TIME: 8 SECONDS²

ENERGY PER USE: 3.7 WH

- HEPA Filtration System Removes 99.999% of Viruses from the Airstream
- 50% Longer Life
- Industry Leading 7-Year Limited Warranty
- 95% Cost Savings Vs. Paper Towels
- Made In USA Certified®
- A Hygienic Hand Drying Solution
- Washable Pre-Filter
- Adjustable Sensor Range
- Microban® Wall Guard

WEIGHT

XL-SB-M-110V: 142 Lbs

DRYER PERFORMANCE

ADJUSTABLE SOUND LEVEL: 65-75 dB **ADJUSTABLE VELOCITY:** 13,000-20,000 LFM

ADJUSTABLE HEAT RANGE: 72°F-135°F **ADJUSTABLE FLOW RATE:** 42-63 CFM

DRYER ELECTRICAL

| VOLTS | AMPS | WATTS | NO HEAT AMPS | NO HEAT WATTS | HERTZ | |
|----------|------------|------------|--------------|---------------|----------|--|
| 110-120V | 11.3-12.2A | 1240-1450W | 4.3-4.5A | 460-530W | 50/60 Hz | |

HAND DRYER CERTIFICATIONS



ACTIVATION

Automatic Sensor Operated

INSTALLATION

Freestanding Plug in Unit

DIMENSIONS

Width: 23 3/4" (603.25mm)

Base Depth: 23 3/4" (603.25 mm)

Height: 59 1/4" (1504.95 mm)

Top Depth: 4 21/25" (105.87 mm)

UL LISTED COMPONENTS

The XLERATOR Mobile Unit is constructed with UL Listed components including: XLERATOR Hand Dryer, Wiring components and Cord with Plug.

¹Based on April 2020 testing performed by LMS Technologies. ²Dry time and energy use testing performed by SGS International on standard XLERATOR Hand Dryer with 0.8" nozzle to 0.25g or less of residual moisture, pursuant to the UL Environment Global Product Category Rules (PCR) for Hand Dryers



TIME TO THROW IN THE TOWEL®

ALLIED HAND DRYER, Ltd. • 1.800.535.4393 • 1.210.733.5918 • sales@handdryer.com • www.handdryer.com

**MAY
2020**

20EDS0900